

Ethernet Link Protector AFS-2000L



AFS-2000L Link Protector

Mission-Critical 가 10/100Base TX Ethernet Main(Primary) Link
 BackUp(Secondary) Link Fail-Safe 가 Ethernet
 Primary Link Secondary Link , Primary link가
 Secondary Link
 Network Link

Features

- 가 2가
- Transparent Link Port
- LED - Primary Secondary Link Port
- Link End to End
- 10BaseTX 100BaseT Link
- Auto/Manual Mode

Application

Primary Link 가 Secondary Link 가
 , Protocol-Timeout 가
 100~200msec 500~750msce


Primary Link가 Secondary Link Primary
 Primary Link Primary Link가
 Secondary Link가 Primary Link Primary
 Secondary Port Primary

Transparent
 IEEE Repeater Budget Calculation


Auto/Manual Mode
 AFS-2000L Auto Mode
 Auto/Manual Link Auto Mode
 가 Link Link
 Alarm ALR CLEAR
 Auto Manual Manual Mode
 Auto Enable LED OFF 가

Application

- Off() - Primary Hub Secondary Hub

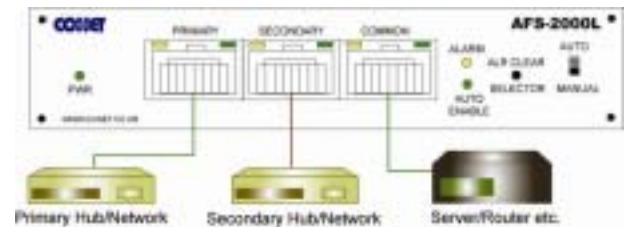

- On() - Primary Server/Router Secondary Server/Router

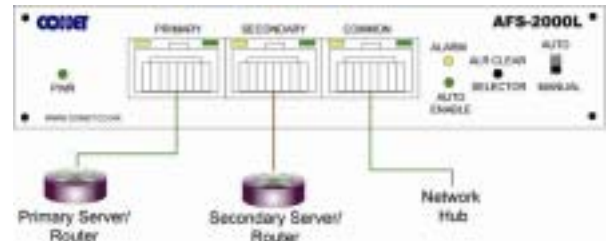

Specification

Receptacles	RJ-45 8-Pin Connector 3 (Router, Server1/2, Switch Port)
Copper Cable Type	22-24 AWG Unshielded Twisted Pair Cable CAT5 (100MHz)
Latency	100Mbps 1 Bit Time
	100m
	12VDC, 0.5A
	0 ~ 40
	-10 ~ 85
	10% ~ 90%, Non-Condensing
	28.0 x 120 x 120 mm