


# UltraLink



- Single, Dual, Quad 가
- Local KVM Port UltraLink Configuration , KVM Switch Local Access
- Ethernet Dial-Up KVM Switch ,
- 1280 x 1024 @ 85Hz
- Solid-State Embedded Unit
- Rose Electronics KVM ,
- KVM
- 가
- Quad 가 4
- 가
- Remote Access User ID Password가
- Remote Client Application , Client License가
- Ethernet , Serial Input KVM
- Flash Memory
- Made in USA
- 1 Warranty

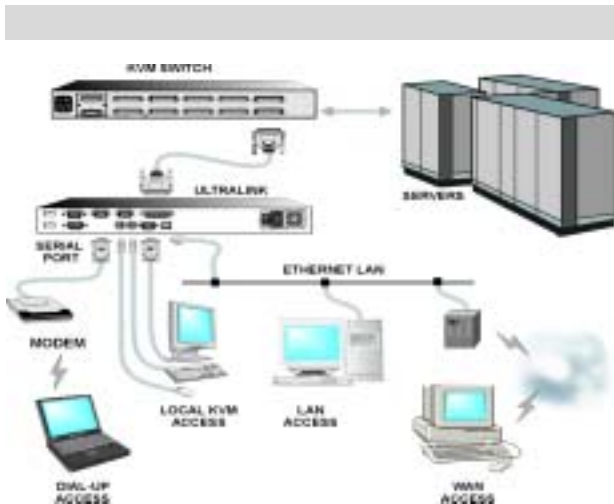

## Ethernet KVM

ROSE Electronics , KVM

Secure Encrypted Operation

Single, Dual, Quad 가

UltraLink  
Dial-Up Local ,  
KVM Switch , 1.000  
UltraLink

UltraLink  
UltraLink Standalone KVM  
Ethernet Network IP Address ,  
Network Windows Workstation Remote Client Software  
UltraLink 가

UltraLink  
가  
Dual UltraLink , Quad UltraLink  
가 KVM Input , 가

View Remote Client Program

UltraLink , Pull Down Connect

1280 x 1024 PC SUN  
가

UltraLink  
가 KVM 가 , LAN / WAN  
/ Dial-Up

UltraLink , Local KVM Station, Standalone Computer  
KVM UltraLink IP Address  
Network Workstation Remote Client Viewer  
UltraLink IP Address

Parameter 가

# UltraLink

## Operation

UltraLink Remote Client Viewer 가  
 . Drop Down UltraLink 가  
 , Control .

## Viewer Windowing

Remote Client Viewer 가  
 . , Viewer

UltraLink Viewer  
 UltraLink 가 , Login Timeout  
 , SSL Lock Out

## Quad Screen Mode

Quad Screen Mode 4 .  
 ,  
 Quad Screen Mode 가 가  
 가 4 1 .

## Color mode

UltraLink 16-Bit ,  
 / / Progressive  
 Color Rendering Depth , Color Rendering  
 가 가 가 ,

가 , 가 가 가  
 . UltraLink  
 가 , PC

1280 x 1024@76Hz SUN  
 가 .

Flash Memory . FTP UltraLink  
 Firmware UltraLink

## Part Numbers

	Low-Cost Single Remote Access Unit
UL-V3	Single Remote Access Unit
UL-DV3	Dual Remote Access Unit
UL-QV3	Quad Remote Access Unit
RM-UMnn	UL-LV3 nn=19", 23" 24"
RM-UBnn	1U nn=19", 23" 24"
RM-UCnn	2U nn=19", 23" 24"
CAB-CXVSMM005	1.5m UltraLink to KVM Switch Cable
CAB-CX0606C005	1.5m UltraLink to CPU Cable
SW-ULV3	UltraLink Viewer Software on 3.5 Floppy (2 Disks)

## Specifications

	Lite : 22.6W x 17.8D x 4.4H (cm) Single : 42.4W x 17.8D x 4.4H (cm) Dual : 42.4W x 17.8D x 4.4H (cm) Quad : 42.4W x 17.8D x 8.9H (cm)
	Lite : 1.86kg Single : 3.6kg Dual : 4.1kg Quad : 5.0kg
	90-240VAC, 100Watts
	: IEC 320 Standard Receptacle Local KVM : Video – HD15F Keyboard – MD6F Mouse – MD6F Switch or Computer : DB25 Female Ethernet Port : RJ45 Serial Port : DB9 Male
Video Bandwidth	150MHz
Chassis	Electro Galvanized Steel
Controls	Power On/Off Switch
Indicators	LEDs : Power, Net, Serial, Local, Ethernet Link, 10/100MB Ethernet Speed 0 -45 , 5%-8% Non Cond.
Approvals	FCC, UL, cUL, TUV, CE, VCCI

